

# Climbing combination Nexus, solo



Age indi-  
cation



Fitness



Balance




Social  
skills



Speed

## Scope of delivery



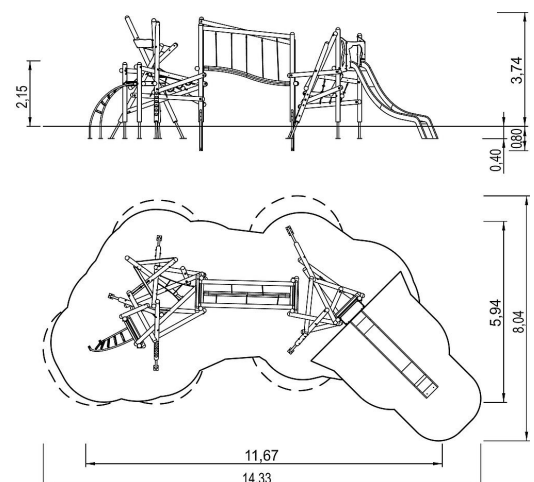







8x post construction: softwood or steel  
 1x twisted ladder: stainless steel (V2A), softwood  
 1x stork step: softwood, chain suspension (V2A), post  
 connection (V2A), plastic-coated steel rope  
 2x parapet: high-pressure laminate (HPL)  
 1x passage protection: softwood  
 2x access restriction: high-pressure laminate (HPL)  
 1x handles: aluminium, coated  
 1x climbing structure: softwood, plastic-coated steel rope,  
 steel galvanised  
 fittings: stainless steel (V2A)













# Climbing combination Nexus, solo



## Technical data

	Material	SW pi
	Minimum space	14,33x8,04x4,09 m
	Impact protection net	65,5 m <sup>2</sup>
	Free falling height	215 cm
	Ground constitution DE/NL/BE	at least sand
	Ground constitution all except DE/NL/BE	at least sand
	Size	11,46x5,65x4,09 m
	mx. number of users	53
	Tested according to standard	EN 1176 - 1/7
	Service interval (in months)	3

## Installation information

	Foundations	16x CF or 14x CF + 2x PFs
	Fundamentlevel	ET 400
	PF Accessories	5x 5632540 + 11x 5631120
	PF drainage	0,10 m <sup>3</sup>
	PF concrete	0,94 m <sup>3</sup>
	PF excavation	2,62 m <sup>3</sup>
	CF Accessories	13x 5631120
	CF drainage	0,10 m <sup>3</sup>
	CF concrete	1,04 m <sup>3</sup>
	CF excavation	2,38 m <sup>3</sup>

## Accessories

-  Slides for platform heights: 1x 195 cm
- Installation accessories e.g. PF
- Please order accessories separately to complete the appliance.